

GVL 8301-K CNV control panel



Performance features

- » Compact ventilation controller
- » For controlling 24 V DC window drives
- » Up to 1 A total drive current
- » 1 ventilation group
- » Input for external controller, e.g. timer
- » Optional individual and/or control circuit ("OPEN-CLOSED")
- » Ventilation safety function (storage operation "OPEN/CLOSED")
- » Ability to connect drives with TMS function
- » Optional connection to rain detectors or wind/rain detectors without an additional module
- » Surface-mounted plastic housing

Accessories

Operation elements




Modules



Sensor systems



Example of application

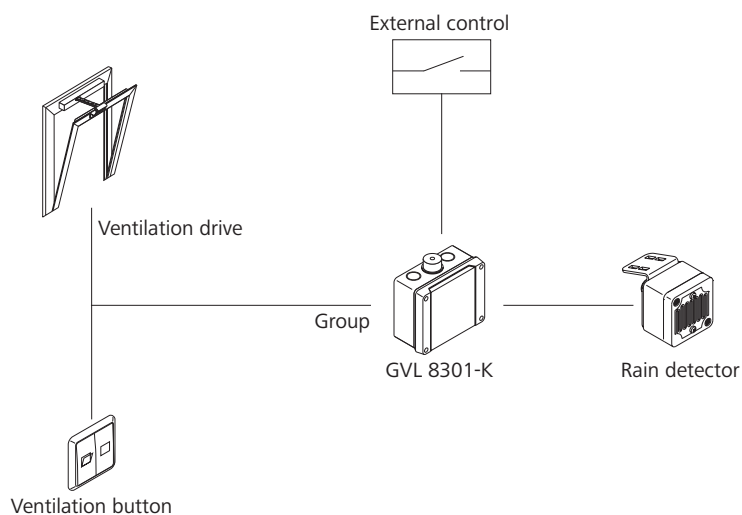

Technical data

| | |
|--------------------|---------------------------------|
| Supply | 230 V AC / 50 Hz / 30 VA |
| Stand-by power | 4.3 W |
| Output | 24 V DC / max. 1 A |
| Mode of operation | Short-time duty 20 % duty cycle |
| Type of protection | IP 54 |
| Temperature range | -5 °C ... +60 °C |
| Housing | Plastic |
| Colour | Light grey (~ RAL 7035) |
| W x H x (D) in mm | 139 x 119 x 70 |
| Weight | 0.85 kg |

Design

| | |
|------------|-----------|
| Type | Art. No. |
| GVL 8301-K | 30.240.20 |